

1/2" Somun Sökme SP-1140EX



Sq. Drive	: 12.7 mm
Bolt Capacity	: 16 mm
Max. Torque	: 1,000 Nm
Working Torque Range	: 50~500 Nm
Free Speed	: 6,000 rpm
Overall Length	: 185 mm
Net Weight	: 2.58 kg
Vibration Level	: 3.4 m/s ²
Vibration Level a	: 4.9 m/s ²
Sound Level	: 88.8 dB

1/2" Somun Sökme SP-7144



Sq. Drive	: 12.7 mm
Bolt Capacity	: 16 mm
Max. Torque	: 1,200 Nm
Working Torque Range	: (F) 50~750 Nm (R) 50~780 Nm
Free Speed	: (F) 5,700 rpm (R) 6,500 rpm
Overall Length	: 154 mm
Net Weight	: 1.8 kg
Vibration Level	: 5.5 m/s ²
Vibration Level a	: 7.4 m/s ²
Sound Level	: 93.1 dB

3/8" 10mm Matkap SP-1525KL



Chuck Size	: 10 mm
Free Speed	: 2,200 rpm
Overall Length	: 195 mm
Net Weight	: 1.23 kg
Vibration Level	: 0.4 m/s ²
Vibration Level a	: 3.0 m/s ²
Sound Level	: 89dB

1/2" Cırcır Somun Sökme SP-1133-2



Sq. Drive	: 12.7 mm
Bolt Capacity	: 10 mm
Working Torque Range	: 13~115 Nm
Free Speed	: 160 rpm
Overall Length	: 254 mm
Net Weight	: 1.2 kg
Vibration Level	: 3.5 m/s ²
Vibration Level a	: 6.2 m/s ²
Sound Level	: 91 dB

1/4 Mini Kalıpcı Taşlama SP-1220S (6mm)



Collet Size : 6 / 6.35 mm
Free Speed : 23,000 rpm
Overall Length : 164 mm
Net Weight : 0.56 kg
Vibration Level : 1.4 m/s²
Vibration Level a : 3.9 m/s²
Sound Level : 87 dB

1/4 Mini Kalıpcı Taşlama SP-7200(6mm) mini



US PAT. No.
D 408,243
6,158,528



Collet Size : 6 / 6.35 mm
Free Speed : 23,000 rpm
Overall Length : 153 mm
Net Weight : 0.41 kg
Vibration Level : 2 m/s²
Vibration Level a : 7.9 m/s²
Sound Level : 82 dB

1/4 Tornavida SP-1800 (6mm)

● Internal Adjustment Type



Hex. Drive : 6.35 mm
Bolt Capacity : 6 mm
Working Torque : 5~15 Nm
Overall Length : 250 mm
Net Weight : 1.09 kg
Vibration Level : 0.8 m/s²
Vibration Level a : 1.3 m/s²
Sound Level : 81 dB




1/4 Tornavida SP-1810 (6mm)

● Internal Adjustment Type



Hex. Drive : 6.35 mm
Bolt Capacity : 6 mm
Working Torque : 5~15 Nm
Overall Length : 205 mm
Net Weight : 1.19 kg
Vibration Level : 1.0 m/s²
Vibration Level a : 1.6 m/s²
Sound Level : 88 dB

1/8 Micro Kalıpcı Taşlama SP-1900 (3mm)

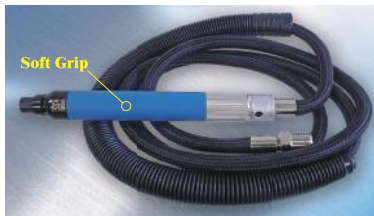

A:140mm B:17mm


Collet Size : 3mm
Free Speed : 70,000rpm
Overall Length : 156mm
Net Weight : 0,35kg
Air Consumption : 0,14³/min

Rear exhaust
Flexible 1.5M long hose

1/4 Mini Kaynak Ağzı Açma SP-7252F (Front Exhaust)



3 Edged Cutters



Mini Body Size



Minimum Diameter : 6.8 mm
Chamfering Capacity : 1,5C
Free Speed : 23,000 rpm
Overall Length : 112 mm
Net Weight : 0.4 kg
Vibration Level a : 1.6 m/s²